
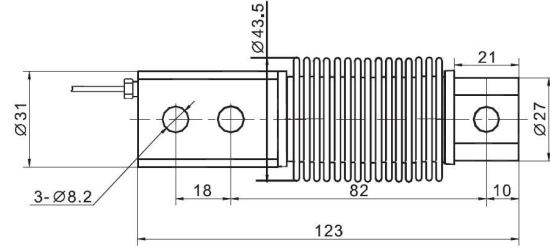


## A11BM

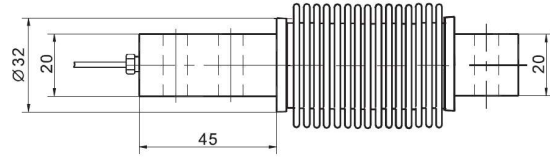

500Kg 3-Ø10.5

### Technical Specifications

Application		Hopper scale	
Model		<b>A11BM</b>	
Capacity	Kg	5、10、20、30、50、100、200、300、500	
Rated output	MV/V	2.0±0.004	
Accuracy class		C2	C3
Maximum number of verification intervals	$n_{max}$	2000	3000
Minimum load cell verification intervals	$V_{min}$	$E_{Max}/5000$	$E_{Max}/7500$
Combined error	%RO	≤ ±0.030	≤ ±0.020
Creep	%RO/30min	0.02	0.016
Temperature effect on sensitivity	%RO/°C	0.00167	0.0012
Temperature effect on zero	%RO/°C	0.0026	0.002
Zero balance	%RO	±1.0	
Input resistance	Ω	365±10	
Output resistance	Ω	350±3	
Insulation resistance	MΩ (50V)	5000	
Recommended excitation voltage	V	5~12	
Compensated temperature range	°C	-10~+40	
Operating temperature range	°C	-35~+80	
Safe overload	%RO	150	
Ultimate overload	%RO	300	
Load cell material		2Cr13	17-4PH Stainless steel
Connecting cable		Ø 5.7X3.5m	
Method of connecting wire		Kırmızı Giriş (+) Siyah Giriş (-) Yeşil Çıkış (+) Beyaz Çıkış (-)	